Entry-Level IP Phone

SIP-T20P

Cost-effective Enterprise IP Phone with 2 Lines

- TI TITAN chipset and TI voice engine
- 2 VoIP accounts, 2x15 characters LCD
- HD Voice: HD Codec, HD speaker, HD handset
- IPV6, BLF/BLA
- 2xLAN, PoE, Headset, Wall-mountable



Yealink expands its lineup of IP phones with a new entry-level product SIP-T20P. It is equipped with TI TITAN chipset and 2x15 characters LCD, offers 2 VoIP accounts, high-definition voice, broad range of voice codecs, security protection for privacy, rich features including XML phonebook, headset, PoE, PnP Auto-provision, and seamlessly work with the leading IP-PBX and soft switch.

It allows users to make calls in a simple, convenient and reliable manner and fully meet the requirement in which the basic business features are required. What is more, SIP-T20P is easy to install and inexpensive to start up for corporate office and residential users.



Entry-Level IP Phone

SIP-T20P

Phone Features

2 VoIP accounts, Hotline, Emergency call Call hold, Call waiting, Call forward, Call return Call transfer (blind/semi-attended/attended) Caller ID display, Redial, Mute, DND Auto-answer, 3-way conferencing Speed dial, Voicemail Message Waiting Indication (MWI) LED Tone scheme, Volume control Direct IP call without SIP proxy Ring tone selection/import/delete Phonebook (300 entries), Black list Call history: dialed/received/missed/forwarded Menu-driven user interface Localized language and input method Soft keys programmable

IP PBX System Integration

Busy lamp field (BLF), BLF list Bridged line appearance (BLA) DND&Forward synchronization Intercom, Paging, Music on hold Call park, Call pickup Call recording, Call completion Group listening, Group pickup Anonymous call, Anonymous call rejection Network conference Distinctive ringtone Dial Plan, Dial-now

Codecs and Voice Features

Wideband codec: G.722 Narrowband codec: G.711µ/A, G.723.1 G.726, G.729AB VAD, CNG, AEC, PLC, AJB, AGC Full-duplex speakerphone with AEC

Network Features

SIP v1 (RFC2543), v2 (RFC3261) IPV6 DNS SRV (RFC3263) Redundant server support NAT Traversal: STUN mode DTMF: In-Band, RFC2833, SIP Info Proxy mode and peer-to-peer SIP link mode IP Assignment: Static/DHCP/PPPoE Bridge/router mode for PC port TFTP/DHCP/PPPoE client Telnet/HTTP/HTTPS server DNS client NAT/DHCP server

Management

Auto-provision via FTP/TFTP/HTTP/HTTPS Auto-provision with PnP SNMP V1/2 optional TR069 optional Configuration: browser/phone/auto-provision Factory configuration customized Trace package and system log export Action URL & Active URI

Security

802.1x, VLAN QoS (802.1pq), LLDP Transport Layer Security (TLS) HTTPS (server/client) SRTP (RFC3711) Digest authentication using MD5/MD5-sess Secure configuration file via AES encryption Phone lock for personal privacy protection Admin/VAR/User 3-level configuration mode


Physical Features

TI TITAN chipset 3-line LCD with an icon line and 2x15 characters lines 31 keys including 9 function keys 4 LEDs: 1xpower, 2xline, 1xmessage 1xRJ9 handset port 1xRJ9 headset port 2xRJ45 10/100M Ethernet ports Wall-mountable Power adapter: AC 100~240V input and DC 5V/1.2A Output Power over Ethernet (IEEE 802.3af) Power consumption: 1.4-2.6W Net weight: 0.77kg Dimension: 185 x 200 x 90mm Operating humidity: 10~95% Storage temperature: up to 60°C

Package Features

Qty/CTN: 10 PCS N.W/CTN: 11.950KG G.W/CTN: 13.300KG Measurement: 0.083CMB Carton Meas: 565x550x235MM



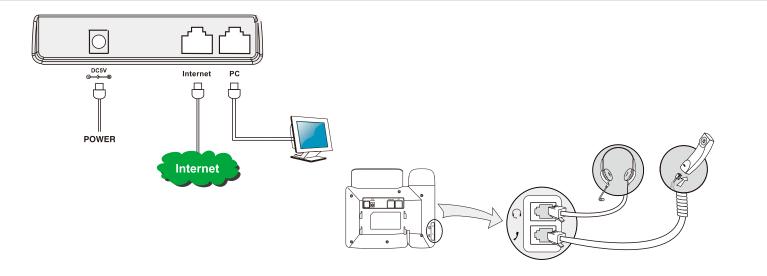



Addr: 4th-5th Floor, South Building, No. 63 Wanghai Road, 2nd Software Park , Xiamen, China Website: www.yealink.com Tel: +86-592-5702000 Email: sales@yealink.com